

Shaft framing



XIZI Elevator Co., Ltd. is a comprehensive elevator manufacturing enterprise that integrates R&D, manufacturing, sales, installation, and after sales service. Drawing on the four decades of elevator industry experience accumulated by the **xizi**® brand, the company possesses three major platforms: a technology R&D center, a smart manufacturing center, and a quality inspection center. Guided by green manufacturing and intelligent digital technology the company remains committed to its corporate mission of "creating infinite possibilities for building transportation."

XIZI ELEVATOR CO., LTD

Add/NO.2329 Science and Technology Ave.,
Lin'an Economic Development Zone, Hangzhou, China
www.xizielevator.com

☎:400-826-1112

This book is a general information print (Edition: First Edition, July 2025; First Printing, July 2025). We reserve the right to make changes to the product technology and specification at any time. The content of the sample is for reference only, and the actual product shall be subject to the contractual agreement between the parties and the actual product.



i520 Plus-G
Domestic Platform Ladder

MAKE A HAPPY PROMISE TO MY HOME

Cabin decoration



Model: U-CR939

- Frame:** Powder coated steel (same color as the derrick)
- Ceiling:** Mirror stainless steel + linear light
- Rear wall:** Orange leather + off-white leather hard roll
- Handrail:** Orange leather + mirror stainless steel
- Floor:** Plastic carpet
- COP:** U-CF3700 13.3-inch white touchscreen monitor



Model: U-CR940

- Frame:** Powder coated steel (same color as derrick)
- Ceiling:** Mirror stainless steel + linear light
- Rear wall:** Off-white leather + wall fabric
- Handrail:** Off-white leather + mirror stainless steel
- Floor:** Plastic carpet
- COP:** U-CF3700 13.3 inch white touchscreen monitor



Model: U-CR941

- Frame:** Sandblasted stainless steel
- Ceiling:** Acrylic large surface light source
- Rear wall:** Decorative painting + hidden light strip + glass + Sandblasted wave grating grid tray
- Floor:** Tempered glass filigree marks
- COP:** U-CF6600 4.3 inch TFT-LCD monitor

Shaft Preferences



Sandblasted lacquer
(customize)



Warm white
(standard)



Champagne gold



Rose silver sandblasted



Titanium black

Landing door area



Motorized double door
(standard)




Electric single door



LOP
Model: ZW6400
Button: Touch button
Panel: Silver aluminum alloy
+ Toughened glass
Installation: wall-mounted

Civil engineering parameters

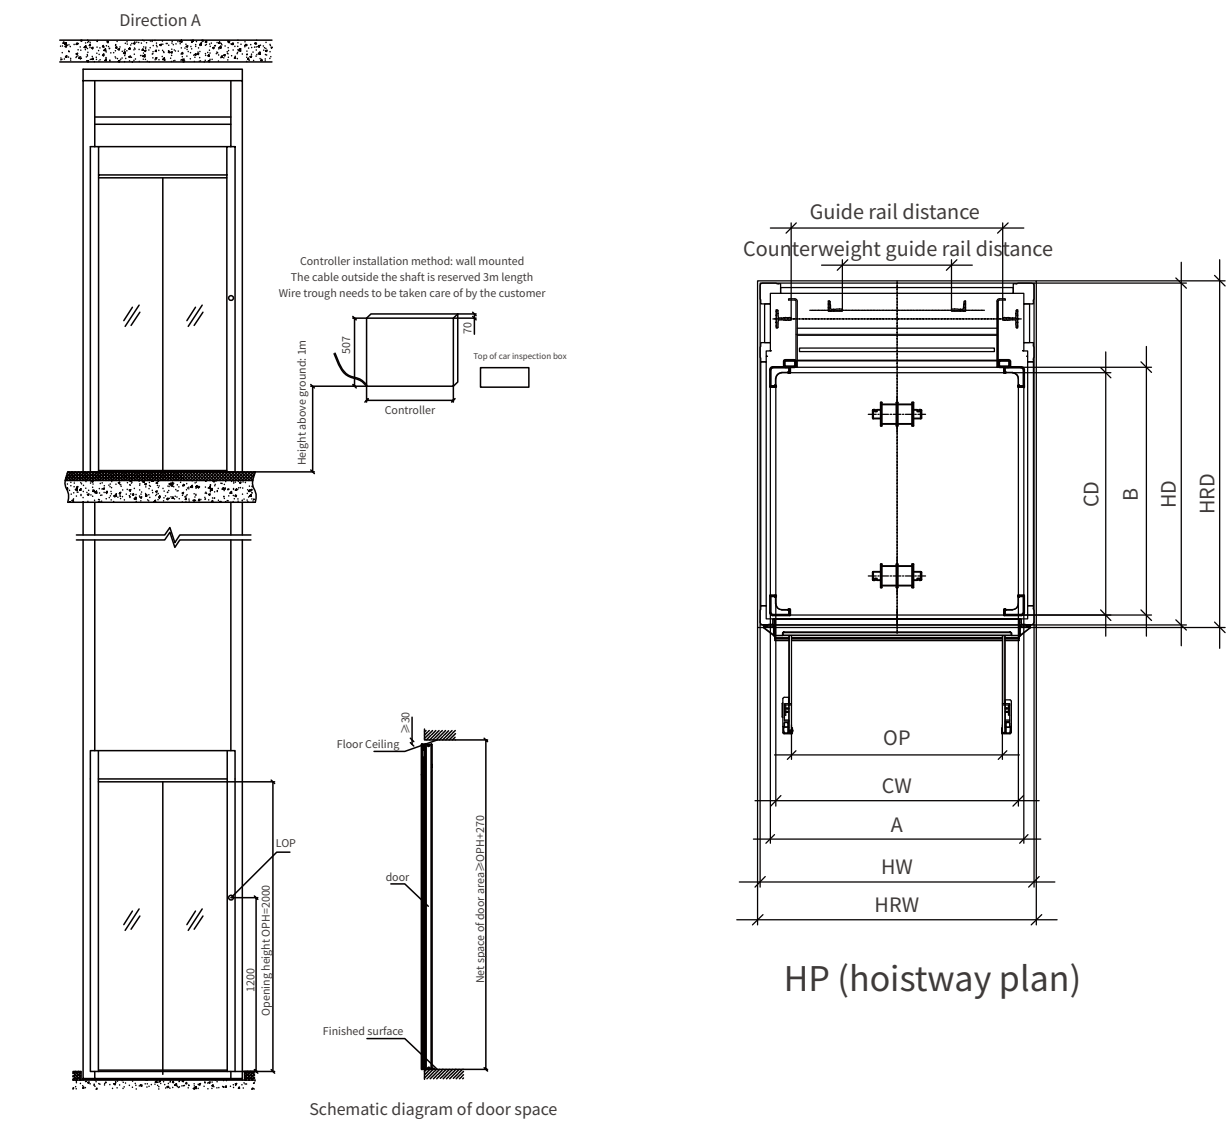

L	DOP	DS	HW	HD	CW	CD	OP	K	S	HRW	HRD				
250kg	Front	Single Opening					820	2850	100	1030	1170				
		Double Opening	1010	1150	880	740	750								
	Side	Single Opening	1240	1010	830	880	750			1260	1030				
		Double Opening	1310		900					1330					
320kg	Front	Single Opening					780			2850	100	1150	1430		
		Double Opening	1130	1410	1000		870								
	Side	Single Opening	1410	1130	1000		760					1430	1150		
		Double Opening					850								
400kg	Front	Single Opening			1250	1070	850					2850	100	1400	1500
		Double Opening	1380	1480			900								
	Side	Single Opening	1480	1380	1070	1250	800							1500	1400
		Double Opening					920								

Shaft Preferences

Energy Saving
Traction Machine

High Efficiency and Energy Saving
With the low power consumption traction and the standby power consumption, which realizes the maximum energy saving.

Space Optimization
Equipped with the new rare earth permanent magnet synchronous gearless energy-saving traction, the size is 70%-80% smaller than that of the ordinary traction.

Stable Operation
The traction sheave adopts an arc-shaped section design and the surface of the spoke is coated, which make the elevator run more stably.



Steel Belt

The steel wire rope wrapped with high-tech, new-wear resistant material polyurethane layer, eliminating grease lubrication, characteristic with longer life, more environmentally friendly.



Controller

Installation
standard side wall mounting, optional embedded mounting
mprove Space Utilization
Small size, easy to install

Energy saving and environmental protection
Low power consumption in standby

Enjoy the Exclusive Configuration
Equipped with contactless technology to enjoy an immersive elevator ride experience



Absolute Position
Control System

The control is more precise and stable, the control accuracy reaches 0.0625mm; the speed detection accuracy reaches 0.025m/s.



Civil engineering parameters

Security guard

- 

Security guard
During the operation of the elevator, infrared rays are scanned in real time. When the light is disturbed, the elevator immediately stops running to protect the safety of passengers.
- 

ARD automatic rescue device
When there is a power failure, the ARD module automatically recognizes and enters the rescue mode to enable the elevator to operate safely and release people on the nearest leveling floor.
- 

Emergency call button
Up to 3 emergency contacts can be set up in advance. When the elevator encounters a malfunction, you can call for help with emergency call button and dial in cycles until it is dialed.

Anti-pinch protection function for closing the door

Intelligent detection of the elevator closing the door, when an obstacle is encountered during the closing process, the door will automatically open to protect the safety of entry and exit.

Intelligent Functions

- 

Password call elevator
Individual passwords can be set for designated floors.
- 

Real-time update
Real-time update of time and weather (Internet connection required).
- 

Entertainment
Various themes can be selected, and play the music.